




EJECTEUR TYPE A NON NITRURE

APPROX. 54 HRC POUR LA RÉALISATION DE BROCHES
 Sim. DIN 1530, type A DIN ISO 6751 Dureté: 54 HRC Mat.:
 1.2343



01791 - d1 - II

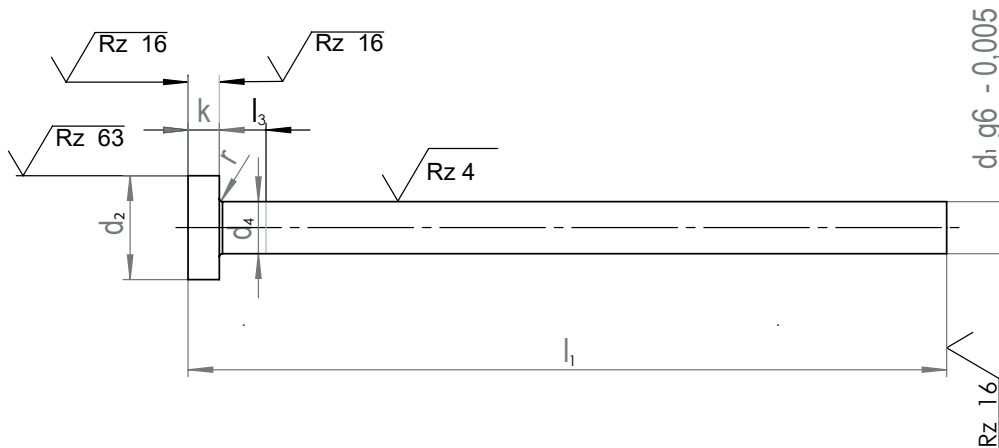

d ₁ g6 -0,005	d ₂ -0,2	d ₄	k 0 -0,05	r +0,2 0	l ₁ +2 0							l ₃			
					100	125	160	200	250	315	400		500		
3,0	6	d1+0,03	3	0,3									5		
3,2															
3,5															
4,0	8														
4,2															
4,5	10														
5,0															
5,5															
6,0			12												
6,2															
6,5															
7,0	14	5	0,5										6		
8,0															
8,5															
9,0	16	d1+0,04	7	0,8									8		
10,0															
11,0															
12,0					18										
12,5															
13,0	22												10		
14,0															
14,5															
16,0	26	d1+0,07	8	1,1									12		
16,5															
20,0	32	d1+0,1	10										13		
25,0															