




EJECTEUR TUBULAIRE NITRURE RODÉ



Interchangeable avec E 1750
 ≈ 626
 Suivant norme DIN ISO 16756
 Mat.: 1.2343

Durété: Corps: 1400 N/m²
 Tête: HRC 45 + 10 / - 5
 Surface: 950 HV sur 0,3 sur la surface

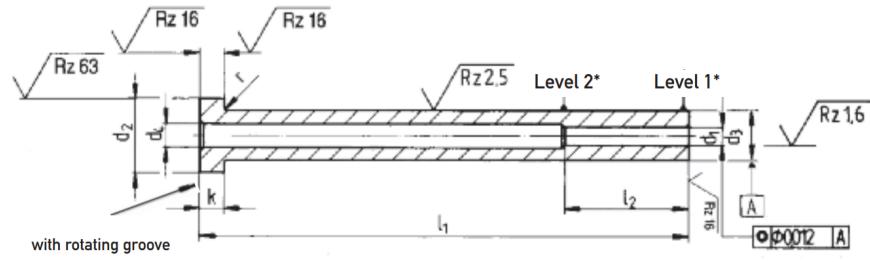

Z105 - d3 - l1 - d1

d1	d3	d4	d2	k	r	l2	l1 + 1																											
							0																											
H5	g6	0 -0.1	0 -0.2	+0,2 -0,05 -0,05	+0,2 0	0 ± 2	50	60	75	100	125	150	175	200	225	250	275	300	325	400														
1,5	3	1,8	6	3	0,3	35																												
1,6		2																																
1,7																																		
2	4	2,5	8				5	0,5	45																									
2,2																																		
2,5	5	3	10							7	0,8	22																						
2,7																																		
3													3,5																					
3,2		3,8																																
3,5	6	4	12										9	1	50																			
3,7																																		
4				4,5																														
4	8	5	14	12	1	50																												
4,2																																		
4,5																																		
5	7	5,5	14				14	1	50																									
5,2																																		
5,5	9	5,8	16							16	1	50																						
6,0																																		
6,0																																		
6,2	10	6,5	16										18	1	50																			
7																																		
7,8																																		
8	12	8,5	20	20	1	50																												
8,2																																		
9																																		
10	14	10,5	22				22	1	50																									
10,5																																		
12																																		
12,5	16	12,5	22							24	1	50																						
12,5																																		
16	20	16,5	26																															

Existe également avec traitement DLC

Z105 DLC -d3 - l1 - d1