




EJECTEUR CUIVRE SANS BERYLLIUM TYPE A

Suivant norme DIN ISO 6751

Mat.: Alliage de cuivre
 Sans béryllium
 Tête: 180 HB
 Corps: 180 HB
 Conductivité thermique: 180 - 208 W/m°K



Z6103- d1 - l1

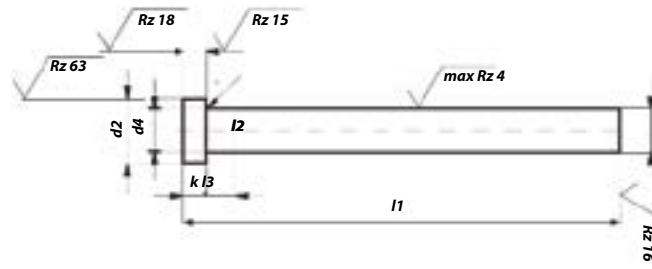

d ₁	d ₂	d ₄	k _r	r	l ₁					l ₃							
					100	160	200	2503	315		4005	500					
g 6-	00		0	0,20													
	-0,2		-0,05	01								ca.					
24		d ₁ + 0,03	2	0,2								5					
2,5	5				3	0,3											
2,7																	
3																	
3,2	6						5	0,5									6
3,5																	
3,7																	
4	7		7	0,8										8			
4,2																	
4,5																	
51	0				7	0,8									10		
6																	
6,2																	
7	12	7	0,8										12				
8																	
8,2																	
10	14			7	0,8									14			
12																	
14																	
16	16	7	0,8										16				
16																	

* AUTRES DIMENSIONS SUR DEMANDE