



## EJECTEUR A LAME NITRURE TYPE FAH




Interchangeable avec E 1755 ≈ 629  
Avec 2 rayons de 0,2 + 0,02  
Mat.: 1.2343

Suivant norme DIN ISO 8693

Z87 - a - b - l1

Dureté: Corps: 1400 N/mm<sup>2</sup>  
Tête: 45 +10/-5 HRC  
Surface: 950 HV sur 0.3mm

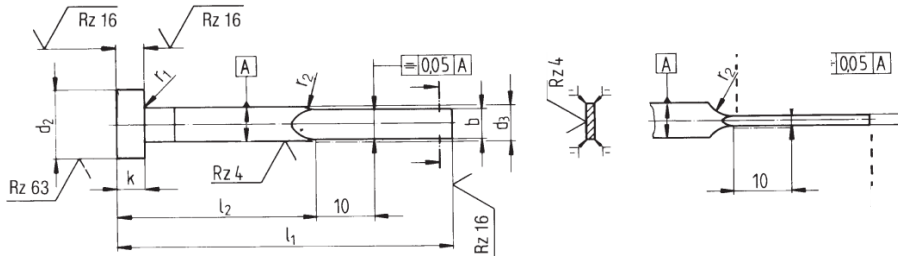

\* Préciser le d3 pour a=1 et b=3.5

a	b	d <sub>3</sub>	d <sub>2</sub>	k	r <sub>1</sub>	r <sub>2</sub>	l <sub>1</sub> + 2/0													
							63	80	100	125	60	200	250	315	400					
-0,015	-0,015	h11	0	0	0	min	l <sub>2</sub> - 1/-2													
			-0,2	-0,05	+0,2		30	40	50	60	80	100	125	160	800					
0,8	3,5	4	8	3	0,3	10														
1																				
1,2																				
1	3,8	4,2																		
0,8																				
1																				
1,2	4,5	5	10	3	0,3															
0,8																				
1																				
1,2	5,5	6																		
1,5																				
2																				
1,2	7,5	8	14	5	0,5															
1,5																				
1,6																				
2	9,5	10																		
1,5																				
2																				
2	11,5	12	18	7	0,8															
2,5																				
2																				
2,5	15,5	16				22														
2,5																				