




EJECTEUR A LAME TREMPE 2 RAYONS TYPE FAH

Interchangeable avec E 1728
 Suivant norme DIN ISO 8693 Mat.: 1.2210
 Avec 4 rayons de 0,2 + 0,02



Z93 - a - b - l1

Corps : HRC 60 ±2
 Tête: HRC 45 ±5

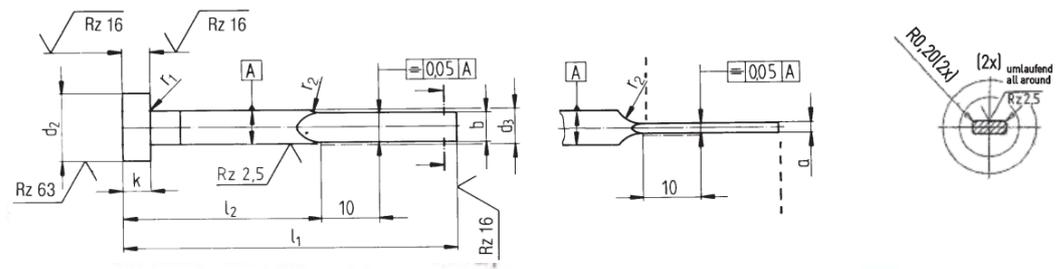

a1	b	d3	d2	k	r1	r2	l1 + 2/0													
							63	80	100	125	160	200	250	315						
0	0	h11	0	0	0,2	min	l2 - 1/-2													
-0,015	-0,015		-0,2	-0,05																
							30	40	50	60	80	100	125	160						
0,5	2,8	3	6																	
0,6																				
0,8																				
1																				
0,5	3,8	4,2	8	3	0,3															
0,6																				
0,8																				
1																				
12																				
1	4,5	5	10			10														
12																				
15																				
1																				
12	5,5	6	12																	
15																				
2																				
12																				
15	7,5	8	14	5	0,5															
2																				
15																				
2																				
15	9,5	10	16																	
2																				
15																				
2																				
2	115	12	18	7	0,8															
2,5																				